


1 Verify kit contents

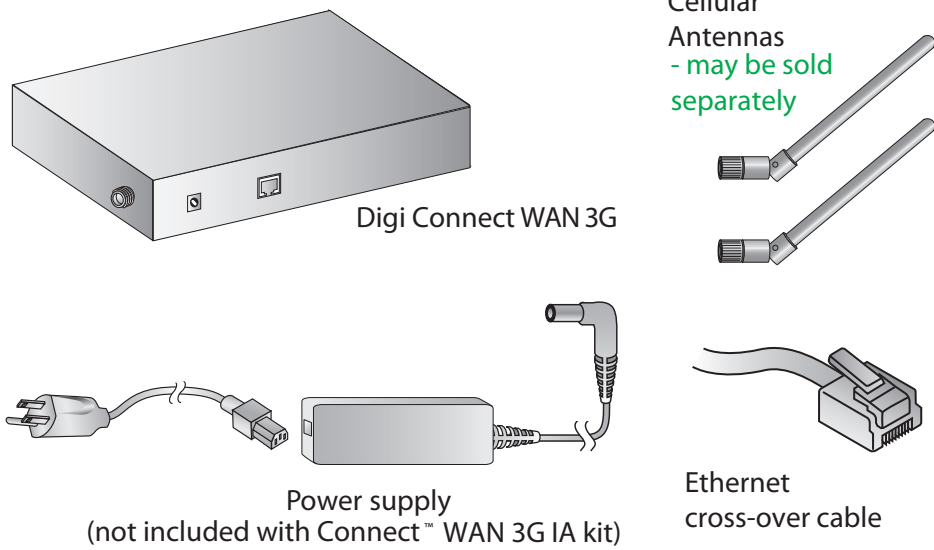


Quick Start Guide

Digi Connect™ WAN 3G
Digi Connect™ WAN 3G IA
CDMA provisioning

90000869_D

2 Connect hardware

- Connect cellular antennas
- Connect Ethernet cross-over cable to a PC and the Ethernet port located directly next to the power jack
- Connect power supply

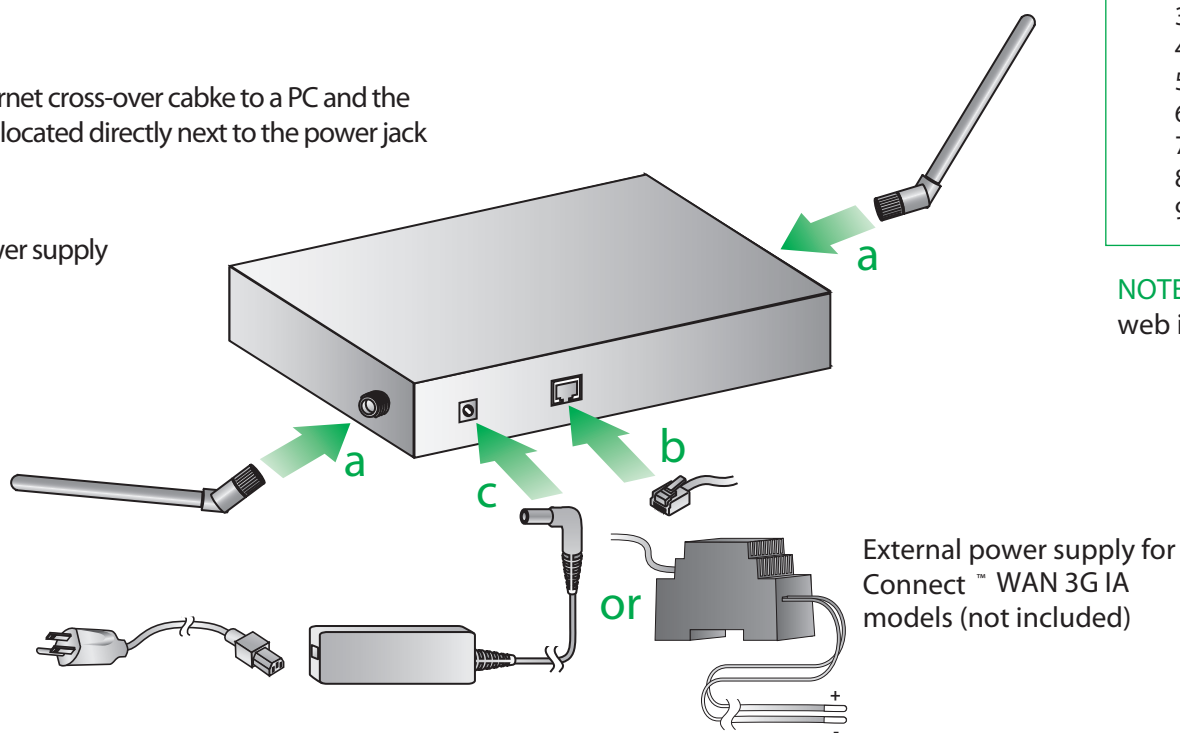

DB9 Serial Pinout

DB9	RS232	RS422/485 Full Duplex	RS485 Half Duplex
1	DCD	CTS-	not used
2	RxD	RxD+	RxD+
3	TxD	TxD+	TxD+
4	DTR	DTR	not used
5	GND	GND	GND
6	DSR	RxD-	RxD-
7	RTS	RTS+	not used
8	CTS	CTS+	not used
9	RI	TxD-	TxD-

NOTE: Set serial mode in software then on the web interface go to Configuration/Serial Ports

3 Configure your cellular settings

- Open your web browser and enter the IP address 192.168.1.1 in the URL address bar
- From the web interface, under Configuration, click "Mobile." Enter your service provider name and connection parameters and click "Apply." For CDMA carriers that support Over-the-Air provisioning, select "Click Here" to automatically provision the device, then click "Apply."

Your device is now configured. If you would like to verify your connections go to step 5

NOTE: If you have difficulty discovering your device, make sure your host computer is set up to obtain IP addresses automatically (DHCP server is enabled by default on the device). Also ensure the firewall software is temporarily disabled

4 Validate Internet connection

- Disconnect the Ethernet cross-over cable and reconnect it. This will re-establish the Ethernet connection by assigning a new IP address through the DHCP server
- To verify your Internet connection, enter a website of your choice (e.g. www.digi.com) in the URL address bar of your browser and click "enter." Connecting to a website indicates the connection is working

For additional information about your cellular connection click System Information > Mobile or reference the User's Guide provided on the Digi support site (www.digi.com/support/)