




Quick Start Guide

VGA/QVGA LCD Application Kit



2 Hardware connection

- Connect the LCD to the LCD Application
 Header on your Development Board (check
 the connector in the table)
- Then connect the power supply to the power connector in the LCD circuit board

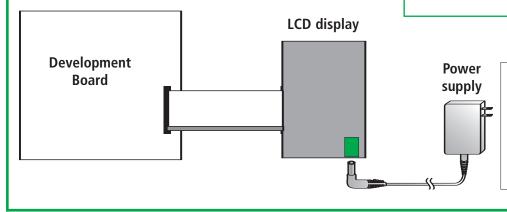



Development	LCD Application
board	Header
ConnectCore 9P 9360	X5
ConnectCore 9M 2443	3 X5
ConnectCore 9C/Wi-9	C P18



3 Download documentation

- To obtain a materials lists and installation instructions specific to your platform, go to http://www.digi.com/support
- From the "Select a Product" drop down box, select "Application Kits"





4 What's next?

Open the User Manual that matches your embedded operating system. It contains instructions for installation and usage of the LCD Device Application Kit drivers and software