

STUFFING TABLE

	CIRCUIT	PART	RCM2200	RCM2210	RCM2250	RCM2260
POWER TO VRAM SWITCH	WITH BATTERY BACKUP CIRCUITRY	R33	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED
CS CONTROL SWITCH	WITH BATTERY BACKUP CIRCUITRY	R27	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED
SRAM	SOP OPTION	U5	128K SRAM	128K SRAM	NOT INSTALLED	NOT INSTALLED
	SRAM SELECT	JP7	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 2-3	ZERO ohm ACROSS PINS 2-3
	CAPACITOR	C11	INSTALLED	INSTALLED	INSTALLED	INSTALLED
	BGA OPTION	U10	NOT INSTALLED	NOT INSTALLED	512K SRAM	512K SRAM
	CAPACITOR	C31,33	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED
	BUFFER	U9	NOT INSTALLED	NOT INSTALLED	INSTALLED	INSTALLED
	BUFFER JUMPER	RP1,2	INSTALLED	INSTALLED	NOT INSTALLED	NOT INSTALLED
	CAPACITOR	C32	NOT INSTALLED	NOT INSTALLED	INSTALLED	INSTALLED
FLASH	FIRST	U3	256K FLASH	256K FLASH	256K FLASH	256K FLASH
	FLASH SELECT	JP3	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2
	FLASH TYPE	JP4	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2
	CAPACITOR	C10	INSTALLED	INSTALLED	INSTALLED	INSTALLED
	SECOND	U8	NOT INSTALLED	NOT INSTALLED	256K FLASH	256K FLASH
	FLASH SELECT	JP2	NOT INSTALLED	NOT INSTALLED	ZERO ohm ACROSS PINS 1-2	ZERO ohm ACROSS PINS 1-2
REAL TIME CLOCK	OSCILLATOR	Y1	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED
	FILTER	R3, C34	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED
	ETHERNET	RJ-45 CONNECTOR WITH BUILT IN MAGNETICS	J2	INSTALLED	NOT INSTALLED	INSTALLED
FILTER CAPACITORS		C18	INSTALLED	NOT INSTALLED	INSTALLED	NOT INSTALLED
		C19	INSTALLED	NOT INSTALLED	INSTALLED	NOT INSTALLED
		C23	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED
LEDS		DS1	INSTALLED	NOT INSTALLED	INSTALLED	NOT INSTALLED
		DS2	INSTALLED	NOT INSTALLED	INSTALLED	NOT INSTALLED
	R34	INSTALLED	NOT INSTALLED	INSTALLED	NOT INSTALLED	
BATTERY	ON BOARD BATTERY	BT1	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED

REVISION HISTORY			REVISION APPROVAL			
REV	ECO	DESCRIPTION OF CHANGE	PROJECT ENGINEER	APPROVAL DATE	DOCUMENT CONTROL	APPROVAL DATE
A	E11399	INITIAL RELEASE	RJH	3/22/01	KIS	3/22/01
B	E11646	ADD CAP TO THE LEFT OF R17 (PAGE 2). ADD REFERENCE TO NEW RCM2210.	RJH	9/21/01	KIS	8/29/01
C	E11570	REMOVED R12, ADDED R42,R43	RJH	9/24/01	KIS	9/21/01
D	E11787	CORRECT STUFFING TABLE SPEC FOR RCM2210 AT U5.	RJH	12/28/01	KIS	12/28/01
E	E11862	CHANGE VALUE OF C5,6 FROM 33PF TO 10PF	RJH	3/11/02	KIS	3/8/02
F	E11942	REMOVE THERMISTOR AT RT1, CHANGE R41 TO 11K.	EP	5/10/02	KIS	5/9/02
G	E12270	IMPROVE ETHERNET JACK CIRCUIT, REMOVE CAPS, BETTER CONNECTOR.	XT	4/30/03	KIS	4/30/03
H	E12850	ADDED RCM2260 OPTION TO STUFFING TABLE	XT	8/10/04	KF	7/23/04
J	001242	REPLACE 32 KHZ CRYSTAL WITH OSCILLATOR. ADD ALTERNATE SRAM AND OPTION	NDH	9/11/09	KS	9/11/09
K	001906	CLARIFY BGA OPTION SRAM PART AT U10, NOT U5	NDH	3/18/10	KS	3/18/10

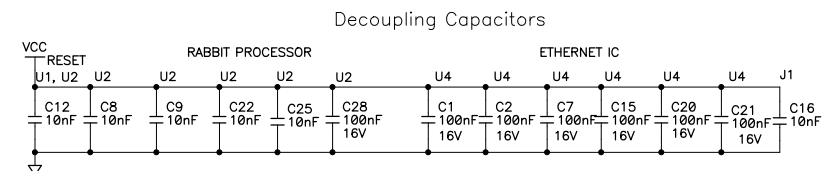
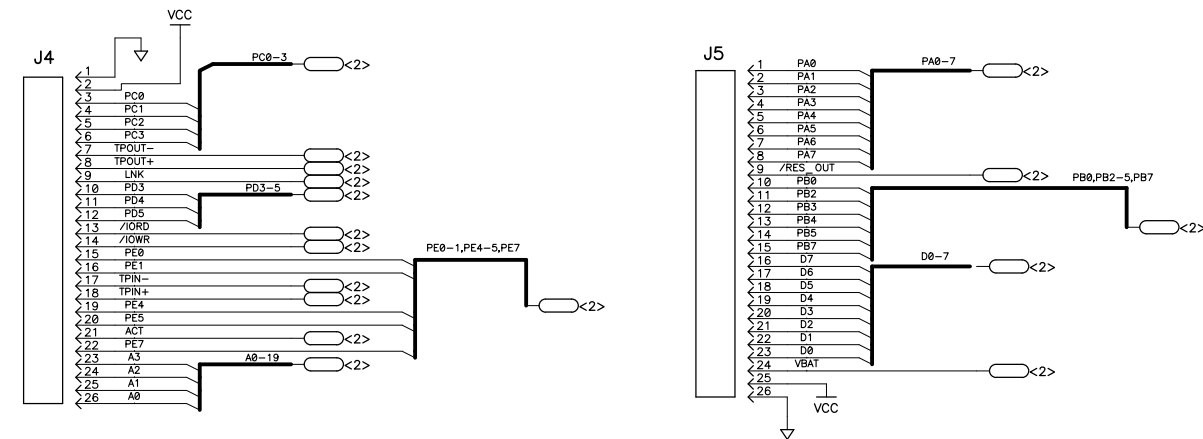


TABLE A

REF DES	DEVICE	DEVICE VOLTAGE INFORMATION			DEVICE: FILTER CAP REF DES(s)
		GND	VCC	VRAM	
U1	ETC811L	1	4		C12
U2	RABBIT 2000	2,27,39 52,77,89	3,28,53, 78,92		C8,C9,C12,C22,C25,C28
U3	FLASH	24	8		C10
U4	RTL8019AS	14,28,44 52,83,86	6,17,47 57,70,89		C1,C2,C7,C15,C20,C21
U5	SRAM 128K X 8	16		32	C11
U7	FLASH	24	8		C29
U8	FLASH	24	8		C30
U9	BIDIRECT BUFFER	10	20		C32
U10	SRAM 512K X 8	D1,E6		D6,E1	C31, C33

- NOTES: UNLESS OTHERWISE SPECIFIED;
- ALL RESISTOR VALUES ARE IN OHMS, 1/16W, 5%
 - ALL CAPACITORS ARE 50VDC OR HIGHER.
 - THE ORIGINATION SOURCE OF A VOLTAGE IS REPRESENTED BY (VCC), AND ALL REFERENCES TO THAT VOLTAGE ARE REPRESENTED BY (VCC).
 - R27, R33, & BT1 NOT NORMALLY STUFFED.
 - COMPONENT VALUES SHOWN WITH AN ASTERISK (*) FOLLOWING THE VALUE, MAY HAVE DIFFERENT VALUES, OR MAY NOT BE STUFFED DEPENDING ON MODEL. SEE STUFFING CHART FOR CLARIFICATION.

COPYRIGHT 2010, RABBIT SEMICONDUCTOR 3/18/2010

APPEND THE FOLLOWING DOCUMENTS WHEN CHANGING THIS DOCUMENT:	DRAWING CONTENT:		TITLE SCHEMATIC DIAGRAM MICRO ETHERNET RABBITCORES RCM2200 SERIES	RABBIT SEMICONDUCTOR
	DRAWN BY: (INITIAL RELEASE) RJH	3/15/01		
	REVISED BY: NDH/KS	3/18/2010		
	APPROVALS: INITIAL RELEASE			
PROJECT ENGINEER: MEHRAN TORKI	9/25/08	SIZE C	DWG NO. 090-0120	www.rabbit.com
ENGINEERING MANAGER: R.MATTHEWS	3/22/01			
SIGNATURES	DATE	SCALE NONE	RELEASE DATE 3/18/2010	SHEET 1 OF 2

