


1 Verify Contents

ConnectPort X4 H 4G /
Digi Connect WAN H 4G




Ethernet
cross-over cable



WiMAX Antenna (2)



XBee Antenna
(XBee models only)




Quick Start Guide

ConnectPort® X4 H 4G
Digi Connect® WAN H 4G

90001269_A


2 Open Device

- a** Unscrew and open the lid. Be sure to note that the top of the enclosure is hinged to the base on the power cord side.

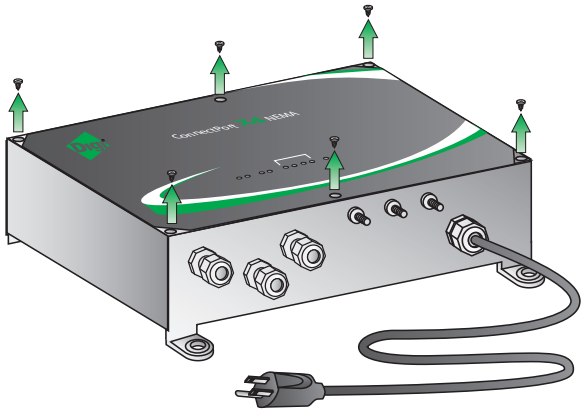


3 Ethernet Installation

- a** Connect one end of the Ethernet cross-over cable to the device and the other end to a PC.

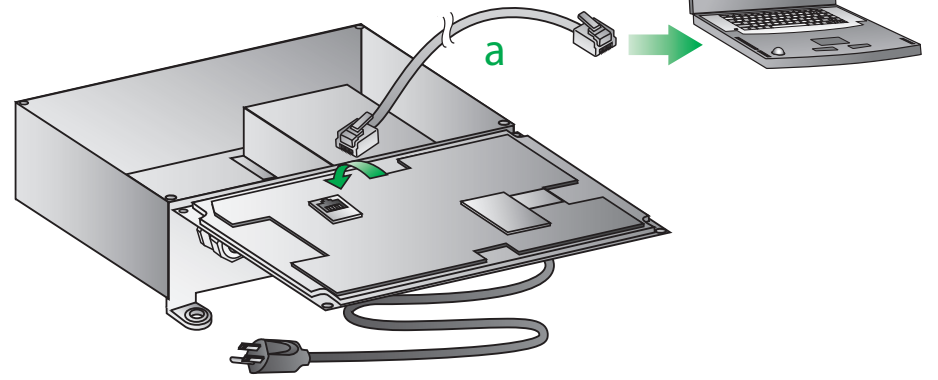

4 Connect Hardware

- a** Connect the WiMAX antennas.
- b** [XBee models only] Connect the XBee antenna.
- c** [Optional] Route any additional cables (serial, Ethernet, sensor) through the cable glands.

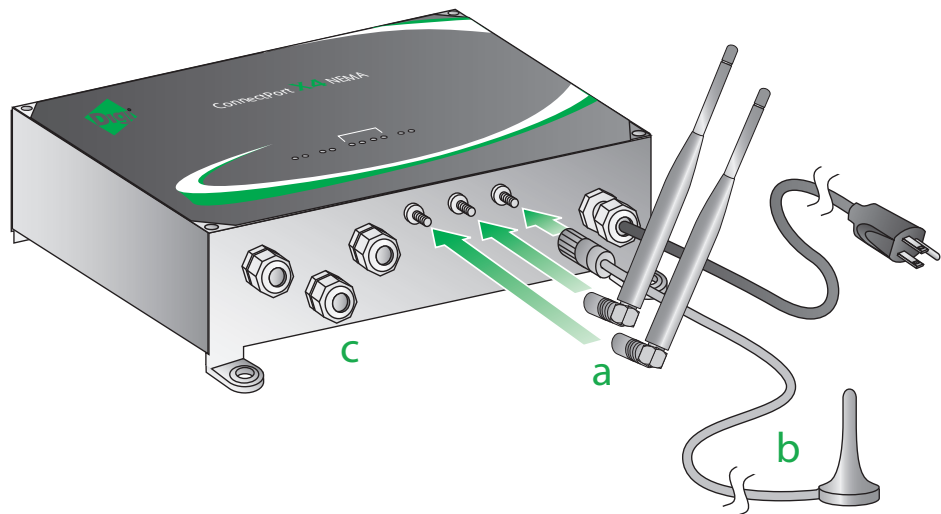

5 Verify Internet Connection

- a** When powered on, the Digi unit will automatically search for 4G service and if it finds service, will connect to it. Finding service may take a few minutes. To view device status, click on **Administration > System Information**. For connection status, click on **System Information > WiMAX**.
- b** The Digi unit runs a DHCP server to assign an IP address to computers plugged into the Ethernet interface. Disconnect the Ethernet cross-over cable and reconnect it. This will re-establish the Ethernet connection and assign a new IP address through the DHCP server.
- c** To verify that the Digi unit has an IP address, check the home page of the unit at 192.168.1.1. To verify your Internet connection, enter a website of your choice (e.g. www.digi.com) in the URL address bar of your browser and click "Enter." Connecting to a website indicates the connection is working. If your device does not have an active account with your 4G provider, you will automatically be redirected to a website where you can register your device.

For additional information about your wireless connection, click **System Information > WiMAX** or reference the User's Guide provided on the Digi support site (www.digi.com/support/).

6 Discover XBee Devices [XBee models only]

- a** In the Web Interface of the ConnectPort X4 / Connect WAN H, click **Configuration > XBee Network**.
- b** Click **Discover XBee Devices**. The XBee radio in the ConnectPort X4 / Connect WAN H will now be listed, along with any other XBee devices that have joined its XBee network.

7 Finalize Unit

- a** Disconnect the Ethernet cross-over cable from the unit.
- b** Carefully re-tighten the six screws securing the faceplate and reassemble the enclosure.