


8 7 6 5 4 3 2 1

D
C
B
A

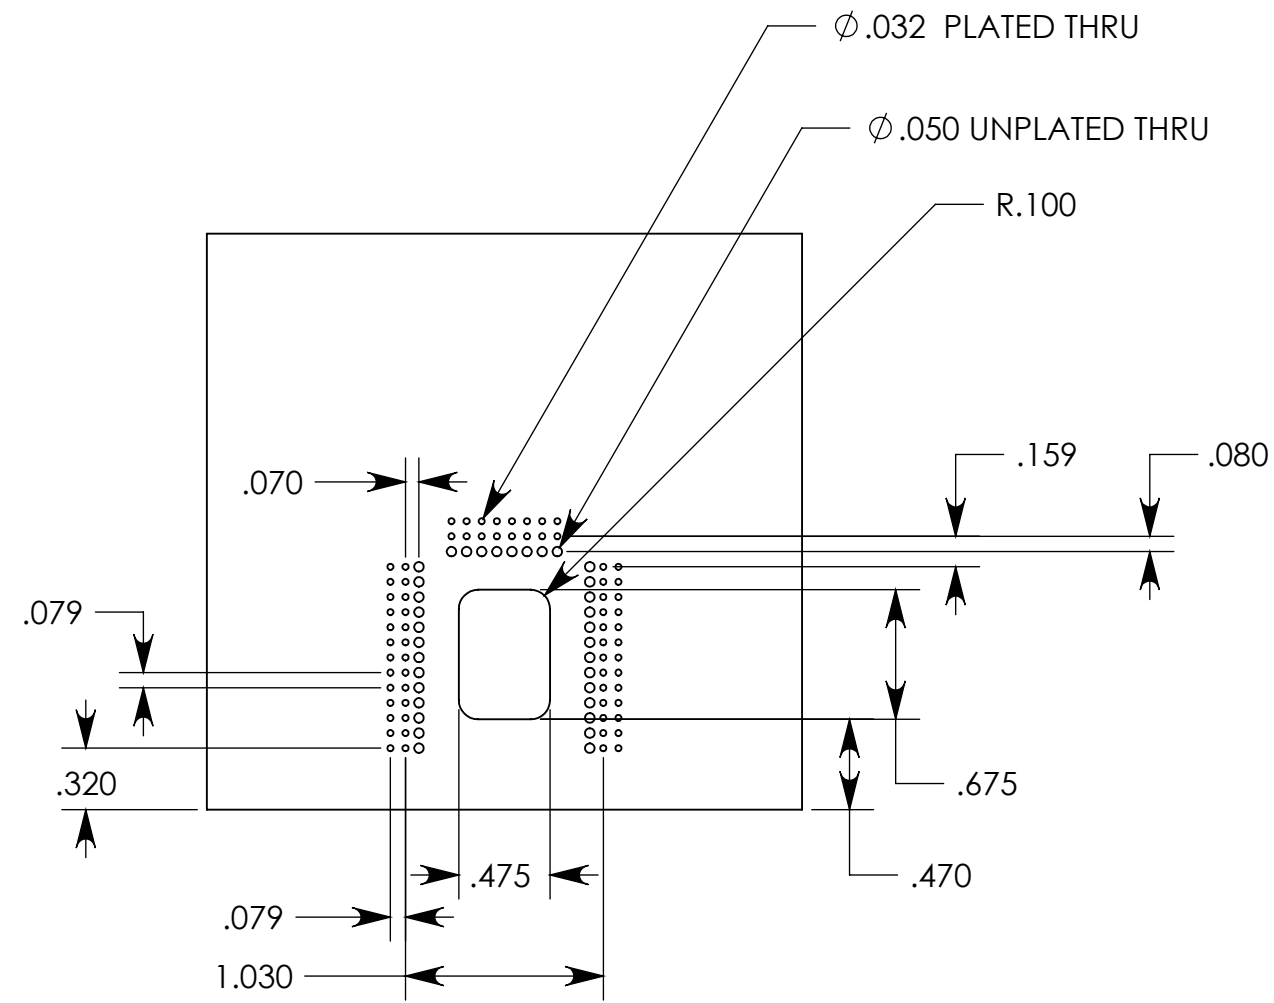

XBIB-U-SS SOCKET PIN PLACEMENT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES.
TOLERANCES ARE AS FOLLOWS:
.XX +/- .01
.XXX +/- .003 ANGLES +/- 1°



THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY AND CONFIDENTIAL TO DIGI INTERNATIONAL, INC. BY ACCEPTING DELIVERY, RECIPIENT AGREES TO RETAIN IT IN CONFIDENCE AND NOT DISCLOSE IT TO OTHERS NOR USE IT FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS DELIVERED, AND TO PROMPTLY RETURN IT UPON REQUEST.

MATERIAL
BLACK DELRIN

FINISH
REMOVE ALL BURRS

REV	ECO	DESCRIPTION OF CHANGE	BY	CKD	APPR	DATE
B	NA	MODIFIED HOLE SPACING	JCR	JCR	JCR	4/30/12
A	NA	NEW RELEASE	JCR	JCR	APPR	7/23/10

APPROVAL		DATE
DESIGNED	JCR	4/30/2012
DRAWN	JCR	4/30/2012
CHECKED	JCR	DATE
ENGINEER	JCR	DATE

TITLE: XBIB-U-SS SOCKET PIN PLACEMENT			
SIZE	CODE	ID	PART NO.
B			
SCALE - NTS	SOLIDWORKS	SHEET 1 OF 1	

8 7 6 5 4 3 2 1