


1 Verify Kit Contents

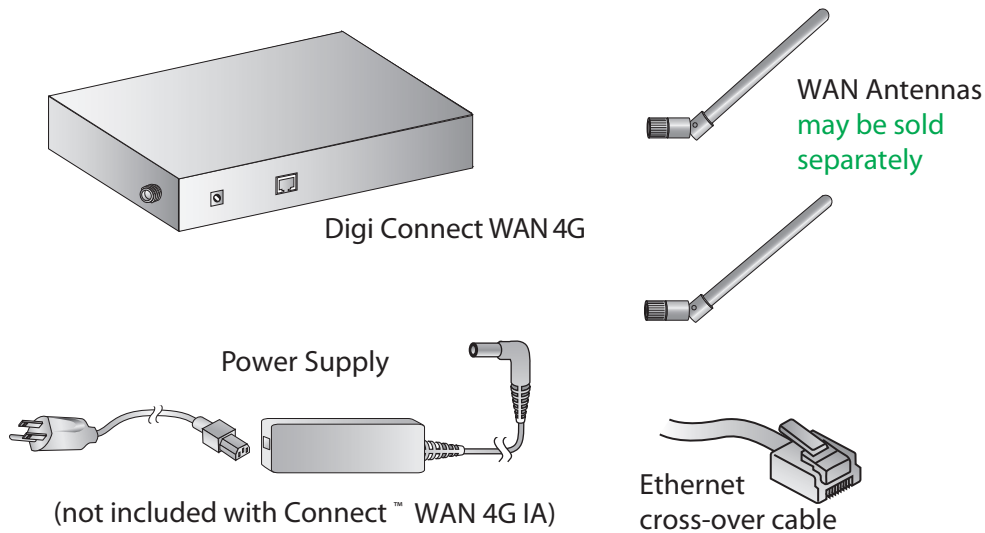


Quick Start Guide

Digi Connect™ WAN 4G Digi Connect™ WAN 4G IA

90002111_A

2 Connect Hardware

- a** Connect WAN antennas
- b** Connect Ethernet cross-over cable to a PC and the Ethernet port located directly next to the power jack
- c** Connect power supply

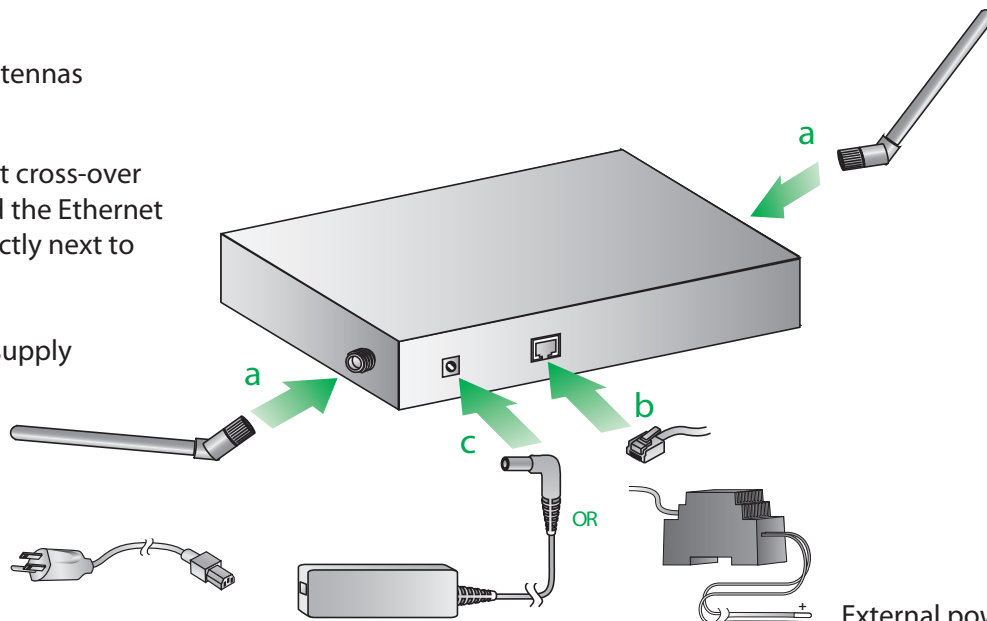

DB9 Serial Pinout

DB9	RS232	RS422/485 Full Duplex	RS485 Half Duplex
1	DCD	CTS-	not used
2	RxD	RxD+	RxD+
3	TxD	TxD+	TxD+
4	DTR	DTR	not used
5	GND	GND	GND
6	DSR	RxD-	RxD-
7	RTS	RTS+	not used
8	CTS	CTS+	not used
9	RI	TxD-	TxD-

NOTE: Set serial mode in software then on the web interface go to Configuration/Serial Ports

NOTE: RS422/485 modes supported on Connect™ WAN 4G IA versions only

External power supply for Connect™ WAN 4G IA models (not included)

3 Configure Your Device

- a** When powered on, the Digi unit will automatically search for 4G service and if it finds service, will connect to it. Finding service may take a few minutes. Open your web browser and enter the IP address 192.168.1.1 in the URL address bar.
- b** To view device status, click on **Administration > System Information**. For connection status, click on **System Information > WiMAX**.

NOTE: If you have difficulty discovering your device, make sure your host computer is set up to obtain IP addresses automatically (DHCP server is enabled by default on the device). Also, ensure all firewall software is temporarily disabled.

4 Verify Internet Connection

- a** The Digi unit runs a DHCP server to assign an IP address to computers plugged into the Ethernet interface. Disconnect the Ethernet cross-over cable and reconnect it. This will re-establish the Ethernet connection and assign a new IP address through the DHCP server.
- b** To verify that the Digi unit has an IP address, check the home page of the unit at 192.168.1.1. To verify your Internet connection, enter a website of your choice (e.g. www.digi.com) in the URL address bar of your browser and click "Enter." Connecting to a web site indicates the connection is working. If your device does not have an active account with your 4G provider, you will automatically be redirected to a web site where you can register your device.

For additional information about your wireless connection, click **System Information > WiMAX** or reference the User's Guide provided on the Digi support site (www.digi.com/support/)