


1 Identify Contents




The information listed below is meant to help aid you in identifying the accessories included in your box. You may need to reference the product part number (X4-xxx-xxx-x) which is located on the Digi label on the outside of the box.

a Identify XBee antenna




b Identify Direct Mount antenna(s)

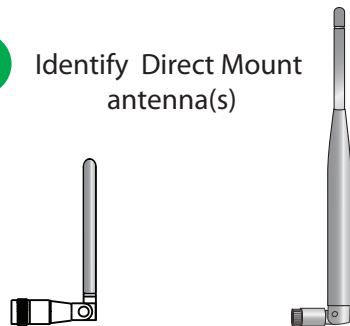


Part Number	# of Direct Mount Antennas
X4-xxx-P01-x	1
All other models	2

c Identify Ethernet Cable



d Identify DIN Rail Mounting Bracket

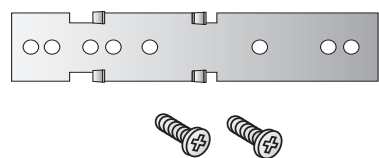

Quick Start Guide


ConnectPort™ X4 IA Cellular or WiMAX

90001236_B

2 Insert SIM Card(s)

[Edge devices only]


a Remove the SIM slot cover plate and insert SIM card(s) as shown. Re-attach the SIM slot cover plate when finished.

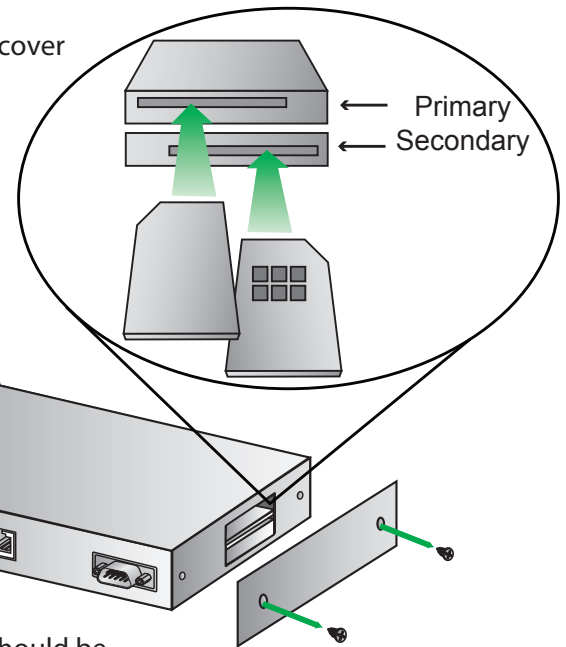


NOTE: The primary SIM Card should be installed in the upper SIM slot, and the contacts should be face down. In the lower slot, the contacts should be face up. In both cases, the end of the SIM card with the chamfered corner should be inserted first.

3 Connect Hardware

a Using the two provided screws, attach the DIN Mounting Bracket to the ConnectPort X4 as shown.

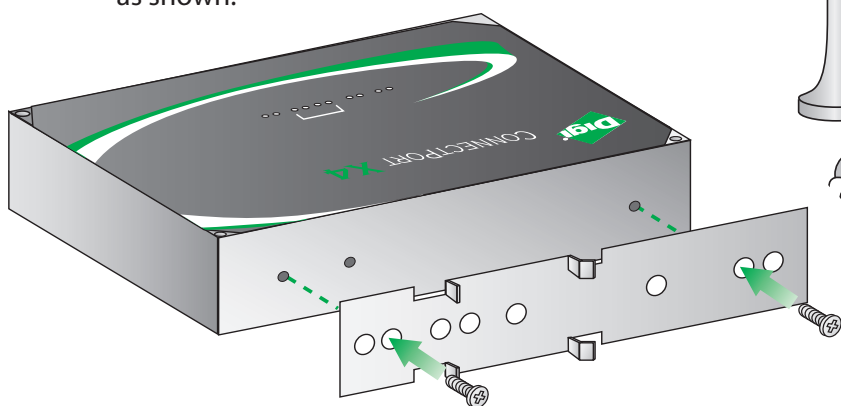

b Connect accessories as shown (1, 2, 3).

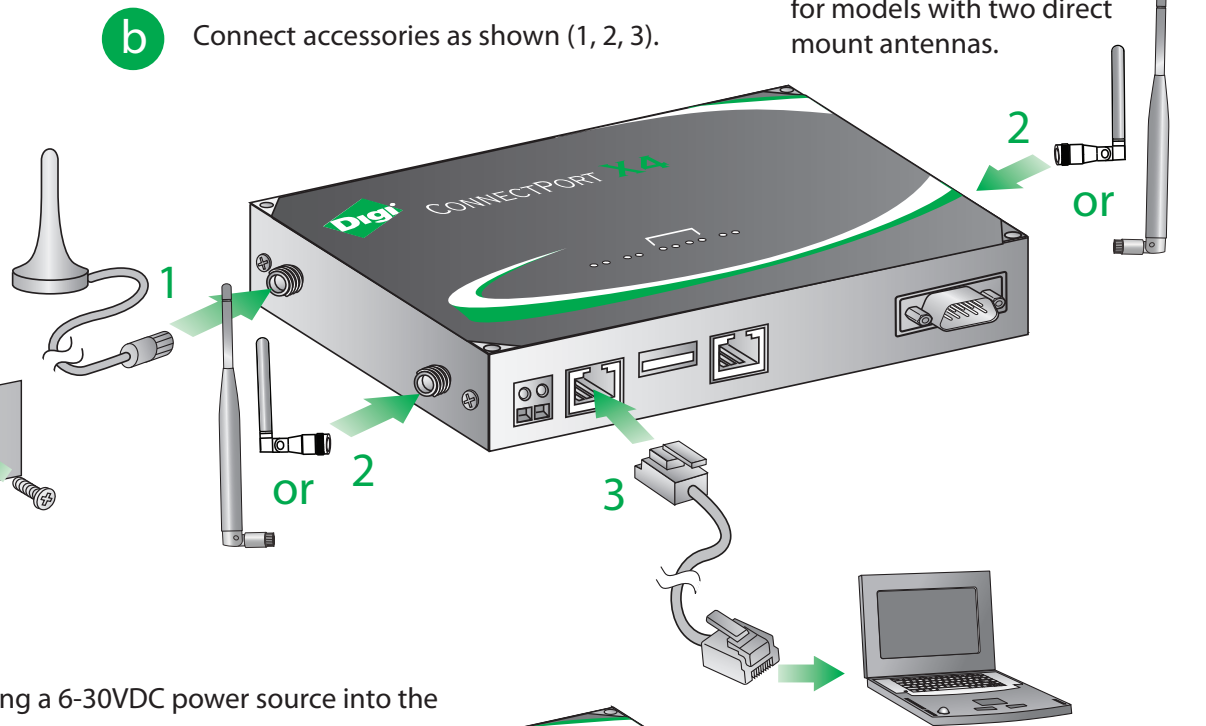


NOTE: This secondary antenna is for models with two direct mount antennas.

c Connect power to the device by inserting a 6-30VDC power source into the power connectors (+ and -).

NOTE: To open the connectors, insert a small screwdriver at a 30 degree angle into the bottom compartment of the connector. Then, push the screwdriver down. This will open the connector and allow you to insert the bare wire from the power source.

When finished, power up the ConnectPort X4.

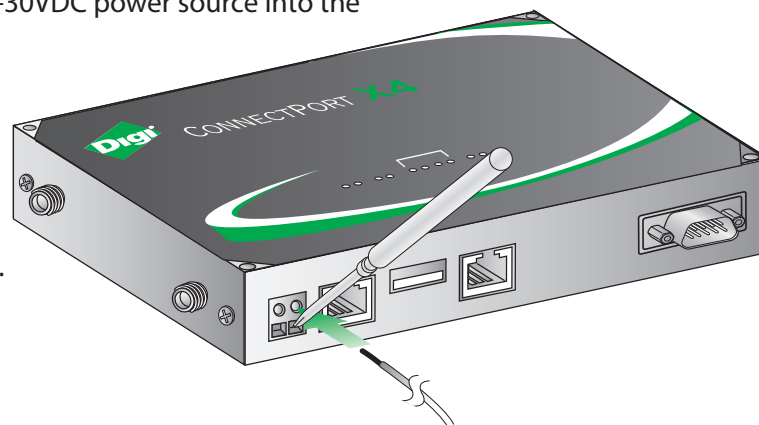

What's Next?

Once you have verified the contents of your box and connected all hardware, please refer to the ConnectPort X4 Getting Started Guide which can be found at www.digi.com/connectportx4.